
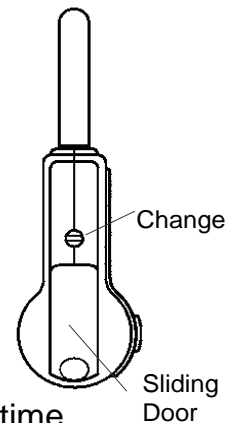


ShurLok Directions For Use

The ShurLok operates on a patented system of two groups of combinations. One combination opens the shackle (factory setting on W U E R) and the second combination opens the sliding key storage door (factory setting on K A Z -). To set your combination at any time, follow the instructions below.

1. Set dials on shackle opening combination (factory setting on W U E R) and open the shackle.
2. Use a coin or paper clip to turn the change button 90 degrees (1/4 turn) clock-wise. Never force the change button. If it is difficult to turn, make sure the numbers are lined up and that you have the correct combination.
3. Set the combination to the desired shackle combination.
4. Return the change button to the original position by turning counter-clockwise 90 degrees (1/4 turn)
5. The sliding door combination is automatically set when the new shackle combination is set. Follow the chart below to find the new combination for the sliding door.

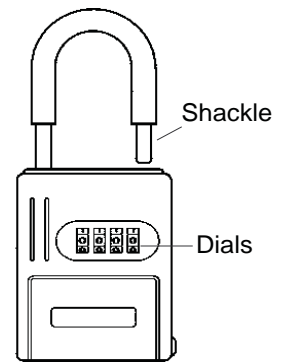

NOTE: Some locks are stiff being new. If the lock will not open the first time, simply press down on the dials to settle them in place.

Group 2

Dial 1		Dial 2		Dial 3		Dial 4	
Shackle	Door	Shackle	Door	Shackle	Door	Shackle	Door
F	--	A	N	S	D	--	E
S	O	E	R	E	Z	M	S
C	W	L	I	M	L	A	O
--	H	N	O	D	C	E	F
O	M	R	U	Z	W	S	R
W	K	I	C	L	H	O	C
H	P	O	P	C	O	F	P
M	F	U	A	W	S	R	--
K	S	C	E	H	E	C	M
P	C	P	L	O	M	P	A

Example: Shackle combination F A D E -- The door combination would then be - N C F

Example: Door combination S O M E -- The shackle combination would then be K N O -

ShurLok Products
18424 HWY 99
Lynnwood, WA 98037

800-654-1786
FAX (206) 523-9876
www.shurlok-products.com

Patent# 391 833